


## 32 Channel GMR-TDT Adapter PCB Rev3- For LS Systems

The GMR32 connection is made thru a single Omnetics connector, part number A71253-001. It is a surface mount, 34 pin, 4 guide posts, standup vertical, protruding female, .025" pitch, dual row connector.


The TDT connection is made via two identical Hirose connectors, part number DF30FC-20DS-0.4V. Each are surface mounted on different sides of the PCB. These connectors have a .4mm pitch.

GMR #	
Grd	Grd
32	31
30	29
28	27
26	25
24	23
22	21
20	19
18	17
16	15
14	13
12	11
10	9
8	7
6	5
4	3
2	1

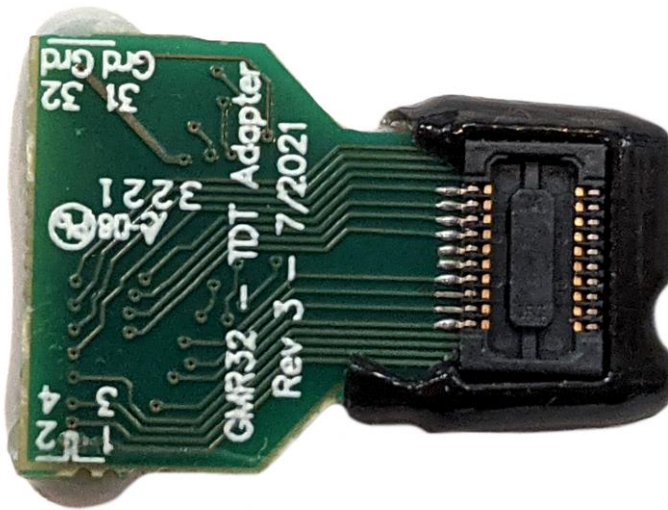

TDT #	
15	16
13	14
11	12
9	10
Grd	Grd
Grd	Grd
7	8
5	6
3	4
1	2

GMR #	
2	1
4	3
6	5
8	7
10	9
12	11
14	13
16	15
18	17
20	19
22	21
24	23
26	25
28	27
30	29
32	31
Grd	Grd

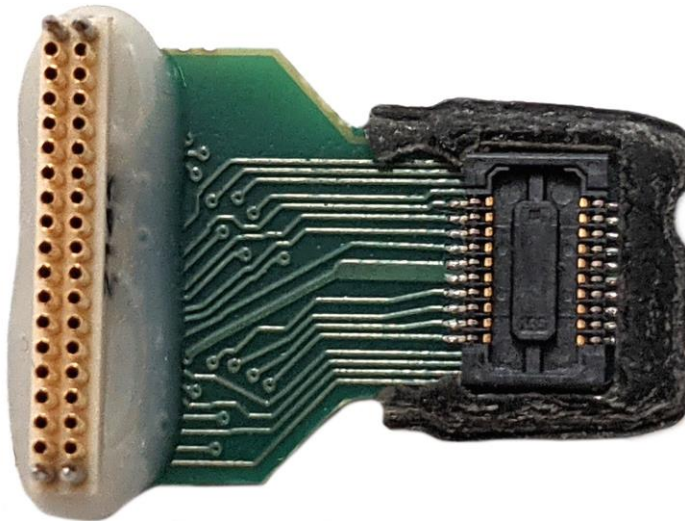

TDT #	
17	18
19	20
21	22
23	24
Grd	Grd
Grd	Grd
25	26
27	28
29	30
31	32